




Light distribution (measured with Philips SLM Gen4 3000 lm/4000 K)



18,6°	
H : 0,5 m	Ø0,2 m
51875 lx	36060 lx
H : 1,0 m	Ø0,3 m
12969 lx	9015 lx
H : 1,5 m	Ø0,5 m
5764 lx	4007 lx
H : 2,0 m	Ø0,7 m
3242 lx	2254 lx

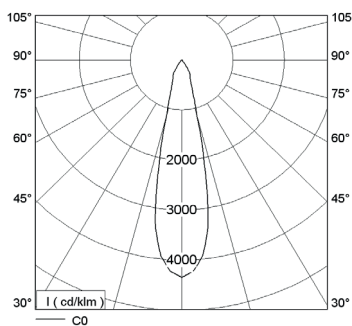

24,0°	
H : 0,5 m	Ø0,2 m
44643 lx	33052 lx
H : 1,0 m	Ø0,4 m
11161 lx	8263 lx
H : 1,5 m	Ø0,6 m
4960 lx	3672 lx
H : 2,0 m	Ø0,9 m
2790 lx	2066 lx



40,2°	
H : 0,5 m	Ø0,4 m
18253 lx	12287 lx
H : 1,0 m	Ø0,7 m
4563 lx	3072 lx
H : 1,5 m	Ø1,1 m
2028 lx	1365 lx
H : 2,0 m	Ø1,5 m
1141 lx	768 lx

LED	Made in Germany	50.000h 5 Jahre	CE	220-240V 50/60 Hz	PHILIPS Kooperationspartner
------------	------------------------	----------------------------	-----------	------------------------------	---------------------------------------

LED Data

Philips 1100lm / 830 A+
Philips 1100lm / 840 A+
Philips 1100lm / 930 A+
Philips 2000lm / 830 A+
Philips 2000lm / 840 A+
Philips 2000lm / 930 A+
Philips 3000lm / 830 A+
Philips 3000lm / 840 A+
Philips 3000lm / 930 A+
Philips 4500lm / 830 A+
Philips 4500lm / 840 A+
Philips 4500lm / 930 A+

Different LED manufacturers on request

Description

Suspended Directional Luminaires, gimbal mounted
Mounting frame made of sheet steel
Heat sink made of extruded aluminium black anodised
Housing made of die-cast aluminium with bayonet lock
Safety glass and reflector integrated into the bayonet ring
All visible parts powder coated
Reflector made of aluminium, polished and anodised
Four adjustable wire suspensions
incl. LED driver

Technical Information

Electronics	Standard version ON / OFF
Electronics	dimnable DALI
Dimension	L x W x H: 730 x 170 x 140mm
Weight	approx. 8.2kg
Colour	Standard: white (RAL 9016), silver (RAL 9006), black (RAL 9005) All colours available Surface fine structure
Reflector design	Inter-changeable bayonet type reflectors
Safety glass	clear or matt
Supply voltage	220-240V, 50/60 Hz
Protection type	IP20
Protection class	I
Light Technology	LED Standard Optional LED for brilliant white and colours in fashion lighting Optional LED for bakery, vegetable and meat products
Supply unit	integrated LED driver
Cooling	passive
LED Lifetime	50.000 operating hours

L = length / **W** = width / **H** = height to heat sink

We reserve the right to change technical details and contents of this data sheet. We are not legally responsible for any unavoidable errors. Product images are examples and may differ from the original.