


L9315-20-30-54

LED
Recessed Spotlight



Light distribution (basis for the light distribution is 2500 lm / 4000 K)

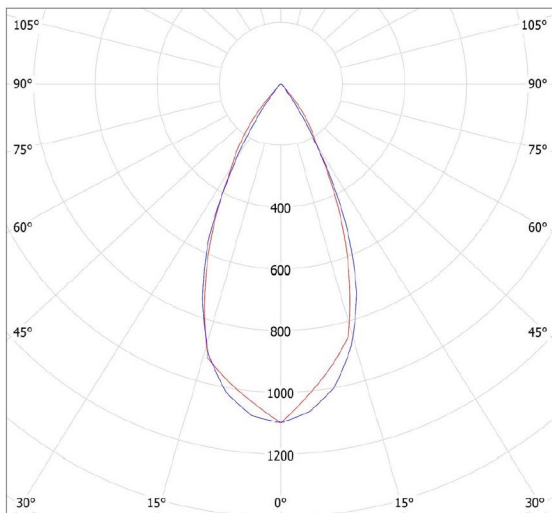

		42,0°
H : 0,5 m		Ø0,4 m
12162 lx		8329 lx
H : 1,0 m		Ø0,8 m
3041 lx		2082 lx
H : 1,5 m		Ø1,2 m
1351 lx		925 lx
H : 2,0 m		Ø1,5 m
760 lx		521 lx

LED	Made in Germany	50.000h 5 Jahre	CE	220-240V 50/60 Hz
------------	------------------------	----------------------------	-----------	------------------------------

LED

20W, 2000lm / 830A+
20W, 2000lm / 840A+
Other Versions - On request

Construction

Recessed Spotlights
Two-piece bezel from die-cast aluminum
Heat sink from extruded aluminum
Integrated safety glass
Aluminum reflector
All visible parts powder coated tool
Includes LED driver

Technical information

Driver	Standard On / Off Electronic Leading/Trailing Edge dimming DALI
Dimensions	AD: 93 mm / ET: 110 mm / DA: 80 mm
Color	White (RAL 9003), Other RAL Colours on Request
Color Reflector	Matt / Specular Reflector
Voltage Protection	220-240V , 50 / 60Hz
Protection	IP54
Protection Class	I
Lighting Technology	Standard LED Fashion lighting: special LED for brilliant white and rich colors Food lighting: LED special for baking - and meat products.
Supply unit	External Driver
Cooling	Passive
Life time	50,000 operating hours

AD = Outer Diameter / **DA** = ceiling cut / **ET** = Minimum fitting depth

All technical data and weights and measurements are carefully created . Errors and omissions excepted. Product illustrations are exemplary and may differ from the original . We reserve the right to make technical changes .

