

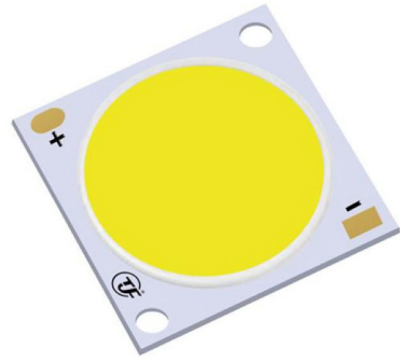


L9317-25F-30-44

LED Recessed Spotlights

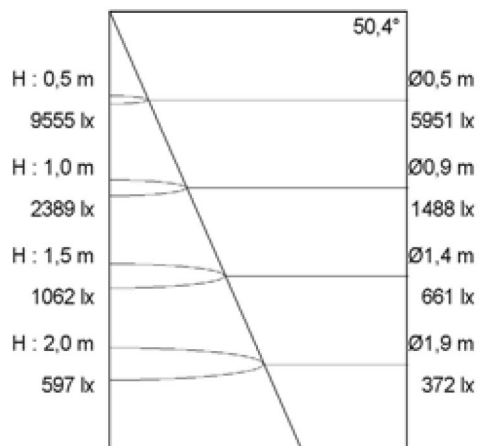

Light distribution (basis for the light distribution is 3500 lm / 3000 K)

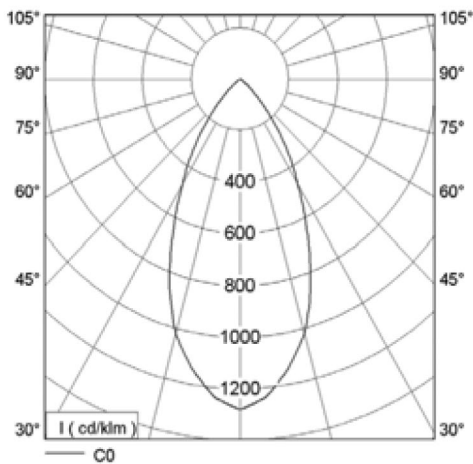

LED

Made in
Germany

50.000 h
5 Jahre

CE

220-240V
50/60 Hz



Project lighting solutions - Getron Lichttechnologie, Germany

LED

25W, 2500lm / 830 A+
25W, 2500lm / 840 A+
Other Versions - On request

Construction

Recessed Downlight
Bezel made from die-cast aluminum
Heat sink from extruded aluminum
Optical chamber contains an integrated safety glass
Aluminum reflector
All visible parts powder coated tool
Includes LED driver

Technical information

Electronics	Standard On / Off Leading/Trailing Edge dimming Dimmable DALI
Dimensions	AD: 132mm / ET: 161mm / DA: 125mm
Color	White (RAL 9003), Other RAL Colours on request
Color Reflector	Matt / Specular Reflector
Voltage Protection	220-240V , 50 / 60Hz
Protection	Optical Chamber IP44 with clear glass, Frosted Outer Diffuser
Protection Class	I
Lighting Technology	Standard LED Fashion lighting: special LED for brilliant white and rich colors Food lighting: LED special for baking - and meat products.
Supply unit	External Driver
Cooling	Passive
Life time	50,000 operating hours

AD = Outer Diameter / **DA** = ceiling cut / **ET** = Minimum fitting depth

All technical data and weights and measurements are carefully created . Errors and omissions excepted. Product illustrations are exemplary and may differ from the original . We reserve the right to make technical changes .

