

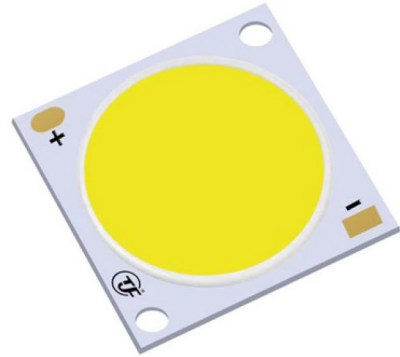


L9317D-35-30-44

# LED Recessed Spotlights

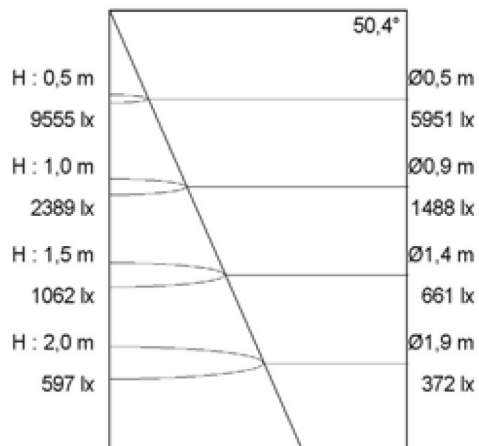

Light distribution (basis for the light distribution is 3500 lm / 3000 K)

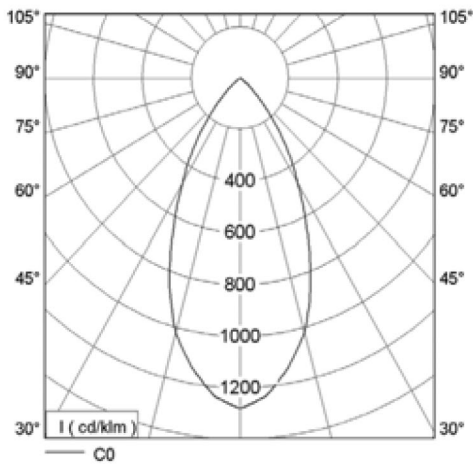

LED

Made in  
Germany

50.000 h  
5 Jahre

CE

220-240V  
50/60 Hz



Project lighting solutions - Getron Lichttechnologie, Germany

## LED

35W, 3500lm / 830 A+  
35W, 3500lm / 840 A+  
Other Versions - On request

## Construction

Recessed Downlight  
Bezel made from die-cast aluminum  
Heat sink from extruded aluminum  
Optical chamber contains an integrated safety glass  
Aluminum reflector  
All visible parts powder coated tool  
Includes LED driver

## Technical information

|                     |   |
|---------------------|---|
| Electronics         | Standard On / Off<br>Leading/Trailing Edge dimming<br>Dimmable DALI   |
| Dimensions          | AD: 158mm / ET: 161mm / DA: 150mm   |
| Color               | White (RAL 9003), Other RAL colours on request  |
| Color Reflector     | Matt / Specular Reflector   |
| Voltage Protection  | 220-240V , 50 / 60Hz  |
| Protection          | Optical Chamber IP44 with clear glass   |
| Protection Class    | I   |
| Lighting Technology | Standard LED<br>Fashion lighting: special LED for brilliant white and rich colors<br>Food lighting: LED special for baking - and meat products. |
| Supply unit         | External Driver   |
| Cooling             | Passive   |
| Life time           | 50,000 operating hours  |

**AD** = Outer Diameter / **DA** = ceiling cut / **ET** = Minimum fitting depth

All technical data and weights and measurements are carefully created . Errors and omissions excepted. Product illustrations are exemplary and may differ from the original . We reserve the right to make technical changes .