



LED
Recessed Spotlight

LS 10

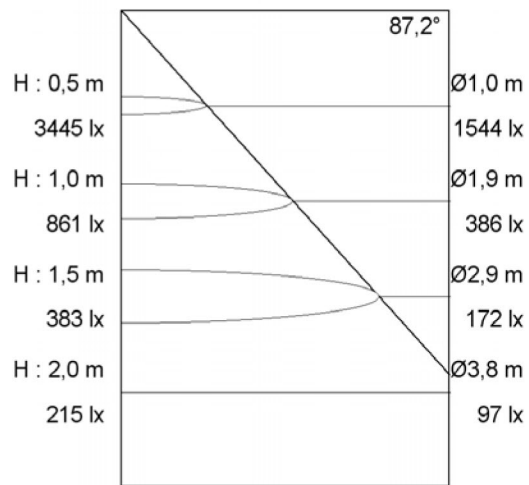

Light distribution

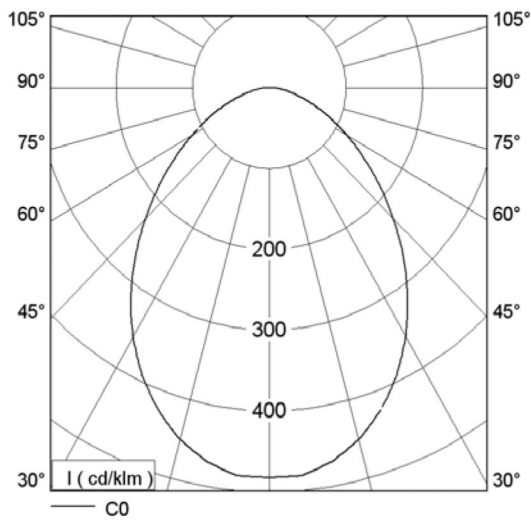

LED

3000 lm, 30W / 830 A+
3000 lm, 30W / 840 A+

Other Versions - On request

Construction

Recessed directional Square spotlight
Gimbal body made of Die-cast aluminium
Heat sink made of extruded aluminum
Aluminum reflector , polished and anodized
Safety glass and reflector integrated in the bayonet ring
All visible parts powder coated
Tool-free installation by springs
Including LED - driver

Technical information

Electronics	Standard On / Off Electronic Leading/Trailing Edge Dimming DALI
Dimension	L: 140mm / W: 140mm / DA : 126 X 126 mm
Ceiling thickness	3-18mm
Weight	About 2.2kg
Color	White (RAL 9003), Other RAL colours on request
Reflector	Aluminium
Safety Glass	Clear
Nominal Voltage	220-240V,50-60Hz
Protection	IP20
Protection Class	I
Lighting Technology	Standard LED
Supply unit	Fashion lighting: special LED for brilliant white and rich colors Food lighting: LED special for baking - and meat products Driver External
Cooling	Passive
LED Lifetime	50,000 Operating hours

L = Length / DA = ceiling cut / W = Width

All technical data and weights and measurements are carefully created . Errors and omissions excepted. Product illustrations are exemplary and may differ from the original . We reserve the right to make technical changes .