


LED
Recessed Spotlight

LS9315-25-30-54



Light distribution (basis for the light distribution is 2500 lm / 4000 K)

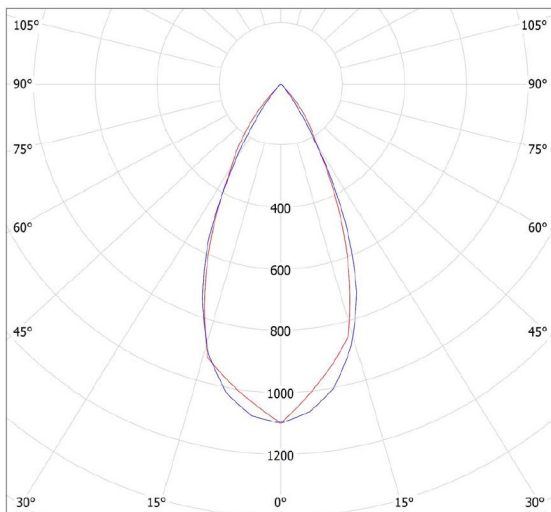

H : 0,5 m	12162 lx	Ø0,4 m	8329 lx
H : 1,0 m	3041 lx	Ø0,8 m	2082 lx
H : 1,5 m	1351 lx	Ø1,2 m	925 lx
H : 2,0 m	760 lx	Ø1,5 m	521 lx

LED	Made in Germany	50.000 h 5 Jahre	CE	220-240V 50/60 Hz
------------	------------------------	-----------------------------	-----------	------------------------------

Construction

LED

25W, 2500lm /830 A+

25W, 2500lm /840 A+

Other Versions - On request

Recessed Spotlights

Two-piece bezel from die-cast aluminum

Heat sink from extruded aluminum

Integrated safety glass

Aluminum reflector

All visible parts powder coated tool

Includes LED driver

Technical information

Driver	Standard On / Off Electronic Leading/Trailing Edge dimming DALI
Dimensions	AD: 110X110 mm / ET: 150 mm / DA: 95X95 mm
Color	White (RAL 9003), Other RAL colours on request
Color Reflector	Matt / Specular Reflector
Voltage Protection	220-240V , 50 / 60Hz
Protection	IP54
Protection Class	I
Lighting Technology	Standard LED Fashion lighting: special LED for brilliant white and rich colors Food lighting: LED special for baking - and meat products.
Supply unit	External Driver
Cooling	Passive
Life time	50,000 operating hours

AD = Outer Diameter / **DA** = ceiling cut / **ET** = Minimum fitting depth

All technical data and weights and measurements are carefully created . Errors and omissions excepted. Product illustrations are exemplary and may differ from the original . We reserve the right to make technical changes .