






Light distribution (measured with Philips SLM Gen4 3000 lm/4000 K)



18,6°	
H : 0,5 m	Ø0,2 m
51875 lx	36060 lx
H : 1,0 m	Ø0,3 m
12969 lx	9015 lx
H : 1,5 m	Ø0,5 m
5764 lx	4007 lx
H : 2,0 m	Ø0,7 m
3242 lx	2254 lx

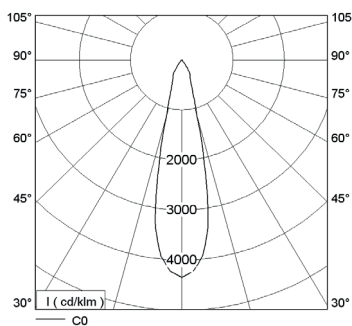

24,0°	
H : 0,5 m	Ø0,2 m
44643 lx	33052 lx
H : 1,0 m	Ø0,4 m
11161 lx	8263 lx
H : 1,5 m	Ø0,6 m
4960 lx	3672 lx
H : 2,0 m	Ø0,9 m
2790 lx	2066 lx



40,2°	
H : 0,5 m	Ø0,4 m
18253 lx	12287 lx
H : 1,0 m	Ø0,7 m
4563 lx	3072 lx
H : 1,5 m	Ø1,1 m
2028 lx	1365 lx
H : 2,0 m	Ø1,5 m
1141 lx	768 lx

LED	Made in Germany	50.000h 5 Jahre	CE	220-240V 50/60 Hz	PHILIPS Kooperationspartner
------------	------------------------	----------------------------	-----------	------------------------------	---------------------------------------

LED Data

Philips 1100lm / 830 A+
Philips 1100lm / 840 A+
Philips 1100lm / 930 A+
Philips 2000lm / 830 A+
Philips 2000lm / 840 A+
Philips 2000lm / 930 A+
Philips 3000lm / 830 A+
Philips 3000lm / 840 A+
Philips 3000lm / 930 A+

Different LED manufacturers on request

Description

Track Directional Luminaires, tilting and turning
Housing from die-cast aluminium with bayonet lock
Heat sink made of extruded aluminium black anodised
Rotation 0°-355° and tilt 180°
Safety glass and reflector integrated in the cover trim
All visible parts powder coated
Reflector made of aluminium, polished and anodised
3- phase adaptor or ceiling- / wall bracket
incl. LED driver

Technical Information

Electronics	Standard version ON / OFF
Electronics	dimnable DALI
Dimension	B: 142mm / H: 180mm / D: 91mm
Weight	approx. 1.4kg
Colour	Standard: white (RAL 9016), silver (RAL 9006), black (RAL 9005) All RAL colours available Surface fine structure
Reflector design	Inter-changeable bayonet type reflectors
Safety glass	clear
Supply voltage	220-240V, 50/60 Hz
Protection type	IP20
Protection class	I
Lighting Technology	LED Standard Optional LED for brilliant white and colours in fashion lighting Optional LED for bakery, vegetable and meat products
Supply unit	integrated LED driver
Cooling	passive
LED Lifetime	50.000 operating hours

B = breadth / **H** = height / **D** = depth

We reserve the right to change technical details and contents of this data sheet. We are not legally responsible for any unavoidable errors. Product images are examples and may differ from the original.