




Light distribution (measured with Xicato XTM 1300 lm/3000 K)

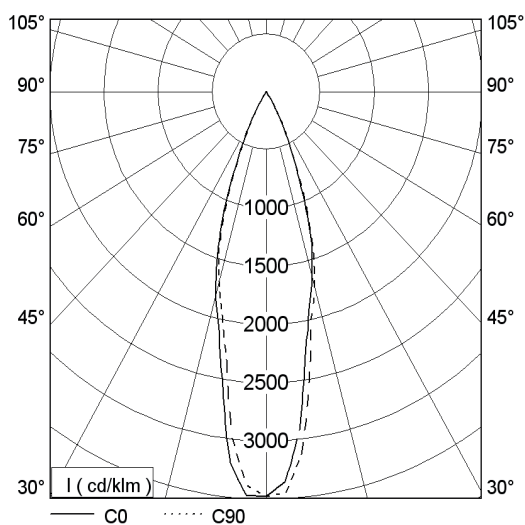

H : 0,5 m	Ø0,2 m
18972 lx	12507 lx
H : 1,0 m	Ø0,5 m
4743 lx	3127 lx
H : 1,5 m	Ø0,7 m
2108 lx	1390 lx
H : 2,0 m	Ø1,0 m
1186 lx	782 lx

LED	Made in Germany	50.000h 5 Jahre	CE	220-240V 50/60 Hz
------------	-----------------	--------------------	-----------	----------------------

LED Data

Xicato 700lm / 827
Xicato 700lm / 830
Xicato 700lm / 840
Xicato 700lm / 930
Xicato 1300lm / 827
Xicato 1300lm / 830
Xicato 1300lm / 840
Xicato 1300lm / 930
Xicato 2000lm / 827
Xicato 2000lm / 830
Xicato 2000lm / 840

Different light colours on request

Description

Recessed Directional Luminaires, asymmetrical
Recessed ring from die-cast aluminium
Heat sink made of extruded aluminium black anodised
Reflector made of aluminium, polished and anodised
Vertical unilaterally swiveling 0 – 30°
All visible parts powder coated
Tool-free installation by spring technology
incl. LED driver

Technical Information

Electronics	Standard version ON /OFF
Electronics	dimnable DALI
Dimension	OD: 108mm / CC: 95mm / RD: 140mm
Ceiling thickness	3 - 18mm
Weight	approx. 0.7kg
Colour	Standard: white (RAL 9016), silver (RAL 9006), black (RAL 9005) All RAL colours available Surface fine structure
Reflector design	specular
Supply voltage	220-240V, 50/60 Hz
Protection type	IP20
Protection class	I/II
Lighting Technology	LED Standard
Supply unit	external LED driver
Cooling	passive
LED Lifetime	50.000 operating hours

OD = outer diameter / **CC** = ceiling cutout / **RD** = recessed depth

We reserve the right to change technical details and contents of this data sheet. We are not legally responsible for any unavoidable errors. Product images are examples and may differ from the original.