



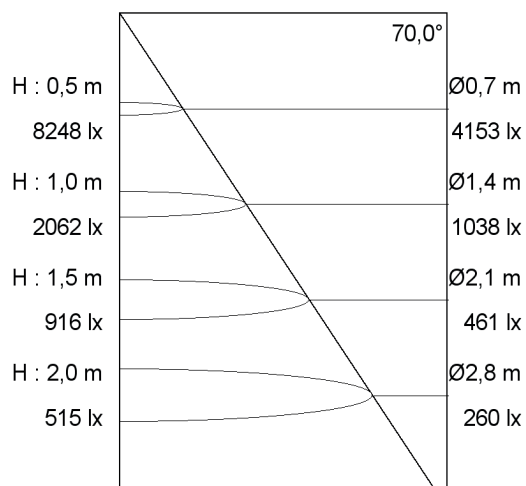

Light distribution (measured with Philips SLM Gen4 3000 lm/4000 K)

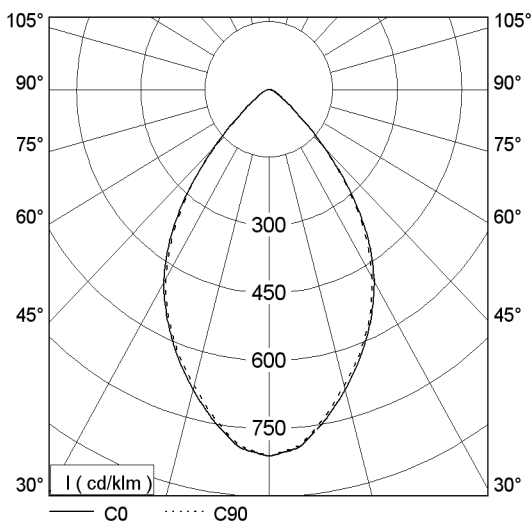

| | | | | | |
|------------|-----------------|--------------------|----|----------------------|---------------------------------------|
| LED | Made in Germany | 50.000h 5 Jahre | CE | 220-240V 50/60 Hz | PHILIPS Kooperationspartner |
|------------|-----------------|--------------------|----|----------------------|---------------------------------------|

LED Data

Philips 1100lm / 830 A+
Philips 1100lm / 840 A+
Philips 1100lm / 930 A+
Philips 2000lm / 830 A+
Philips 2000lm / 840 A+
Philips 2000lm / 930 A+
Philips 3000lm / 830 A+
Philips 3000lm / 840 A+
Philips 3000lm / 930 A+
Philips 4500lm / 830 A+
Philips 4500lm / 840 A+
Philips 4500lm / 930 A+

Different LED manufacturers on request

Description

Recessed Luminaires
Mounting frame made of sheet steel
Heat sink made of extruded aluminium black anodized
Reflector made of aluminium MIRO
Plastic diffuser integrated into the reflector
All visible parts powder coated
Tool-free installation by spring technology
incl. LED driver

Technical Information

| | |
|---------------------|--|
| Electronics | (Standard version ON / OFF) |
| Electronics | (dimnable DALI) |
| Dimension | OD: 195x195mm / CC: 165x165mm / RD: 180mm |
| Ceiling thickness | 1 - 18mm |
| Weight | approx. 1.3kg |
| Colour | Standard: white (RAL 9016), silver (RAL 9006), black (RAL 9005) All RAL colours available Surface fine structure |
| Reflector design | matt |
| Supply voltage | 220-240V, 50/60 Hz |
| Protection type | IP20 |
| Protection class | I/II |
| Lighting Technology | LED Standard Optional LED for brilliant white and colours in fashion lighting Optional LED for bakery, vegetable and meat products |
| Supply unit | external LED driver |
| Cooling | passive |
| LED Lifetime | 50.000 operating hours |

OD = outer diameter / **CC** = ceiling cutout / **RD** = recessed depth

We reserve the right to change technical details and contents of this data sheet. We are not legally responsible for any unavoidable errors. Product images are examples and may differ from the original.