




Light distribution (measured with Philips Flex High Housing 2000 lm/4000 K)

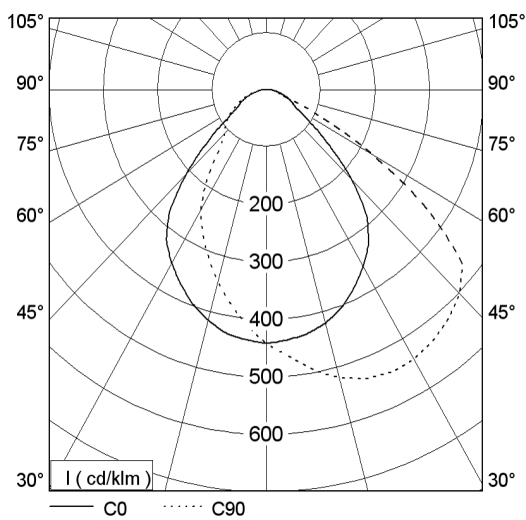

| | | | | | |
|------------|-----------------|--------------------|-----------|----------------------|---------------------------------------|
| LED | Made in Germany | 50.000h 5 Jahre | CE | 220-240V 50/60 Hz | PHILIPS Kooperationspartner |
|------------|-----------------|--------------------|-----------|----------------------|---------------------------------------|

LED Data

Philips 1100lm / 830 A
Philips 1100lm / 840 A
Philips 2000lm / 830 A
Philips 2000lm / 840 A
Philips 3000lm / 830 A
Philips 3000lm / 840 A

Description

Recessed Luminaires
Recessed Ring from die-cast aluminium
Heat sink made of extruded aluminium black anodised
Reflector made of aluminium, powder coated to RAL 9016
All visible parts powder coated
Tool-free installation by spring technology
incl. LED driver

Technical Information

| | |
|---------------------|--|
| Electronics | Standard version ON / OFF |
| Electronics | dimnable DALI |
| Dimension | OD: 230mm / CC: 213mm / RD: 230mm |
| Ceiling thickness | 1 - 20mm |
| Weight | approx. 1.7kg |
| Colour | Standard: white (RAL 9016), silver (RAL 9006), black (RAL 9005) All RAL colours available Surface fine structure |
| Reflector design | Powder coated to RAL 9016 texture |
| Supply voltage | 220-240V, 50/60 Hz |
| Protection type | IP20 |
| Protection class | I/II |
| Lighting Technology | LED DLM Flex |
| Supply unit | external LED driver |
| Cooling | passive |
| LED Lifetime | 50.000 operating hours |

OD = outer diameter / **CC** = ceiling cutout / **RD** = recessed depth

We reserve the right to change technical details and contents of this data sheet. We are not legally responsible for any unavoidable errors. Product images are examples and may differ from the original.