



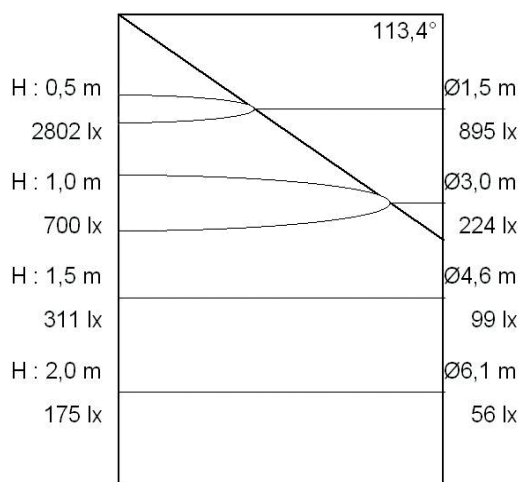

**Light distribution** (measured with Philips SLM Gen4 2000 lm/4000 K)

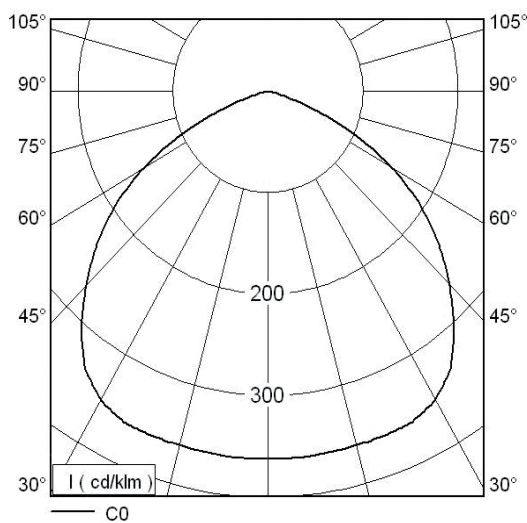

<b>LED</b>	Made in Germany	50.000h 5 Jahre	<b>CE</b>	220-240V 50/60 Hz	<b>PHILIPS</b> Kooperationspartner
------------	-----------------	--------------------	-----------	----------------------	---------------------------------------

## LED Data

Philips 1100lm / 830 A+  
Philips 1100lm / 840 A+  
Philips 1100lm / 930 A+  
Philips 2000lm / 830 A+  
Philips 2000lm / 840 A+  
Philips 2000lm / 930 A+

Different LED manufacturers on request

## Description

Surface Mounted Luminaires  
Tube housing extruded aluminium  
Bayonet device for connecting to ceiling fixture  
Safety glass integrated in the cover trim  
All visible parts powder coated  
Reflector made of aluminium, polished and anodised  
incl. LED driver

## Technical Information

Electronics	Standard version ON / OFF
Electronics	dimnable DALI
Dimension	OD: 230mm / H: 86mm
Weight	approx. 1.5kg
Colour	Standard: white (RAL 9016), silver (RAL 9006), black (RAL 9005) All RAL colours available Special powder coating for outdoor use possible Surface fine structure
Reflector design	matt
Safety glass	clear or matt
Supply voltage	220-240V, 50/60 Hz
Protection type	IP44 or IP65
Protection class	I
Lighting Technology	LED Standard
Supply unit	integrated LED driver
Cooling	passive
LED Lifetime	50.000 operating hours

**OD** = outer diameter / **H** = height

We reserve the right to change technical details and contents of this data sheet. We are not legally responsible for any unavoidable errors. Product images are examples and may differ from the original.