



Type 1




Type 2

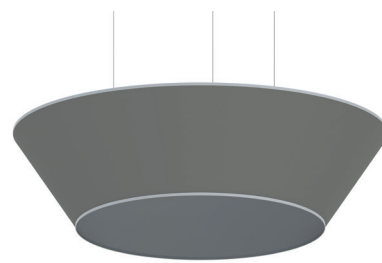


Type 3



Type 4

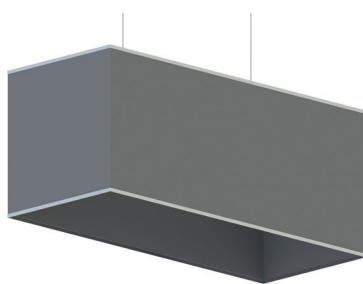

Type 5

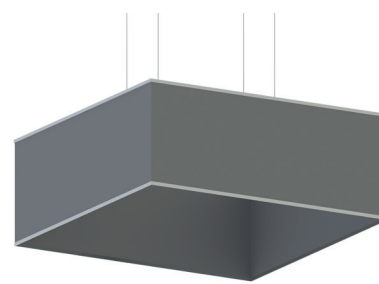

Type 6



Type 7



Type 8



Type 9

## LED Data

Philips 1100lm / 830 A+  
Philips 1100lm / 840 A+  
Philips 1100lm / 930 A+  
Philips 2000lm / 830 A+  
Philips 2000lm / 840 A+  
Philips 2000lm / 930 A+  
Philips 3000lm / 830 A+  
Philips 3000lm / 840 A+  
Philips 3000lm / 930 A+

## Description

Suspended fitting with cloth shade  
(Chintz material according to colour chart)  
Heat sink from extruded aluminium black anodised  
Safety glass integrated in bayonet ring  
Aluminium reflector polished and anodised  
All visible parts coated to RAL colours  
Suspended from adjustable steel wires  
incl. LED driver

## Technical Information

Electronics	Standard version ON / OFF
Electronics	dimnable DALI
Dimension	Cloth Shades made to measure
Colour	Standard: white (RAL 9016), silver (RAL 9006), black (RAL 9005) All RAL colours available Surface fine structure
Cloth shade colour:	according to Chintz colour chart
Reflector	polished / matt
Cloth shade	underneath closed or open
Supply voltage	220-240V, 50/60 Hz
Protection type	IP20
Protection class	I
Lighting Technology	LED Standard Optional LED for brilliant white and colours in fashion lighting Optional LED for bakery, vegetable and meat products
Supply unit	integrated LED driver
Cooling	passive
LED Lifetime	50.000 operating hours